



100 Royal Way
 Temple, GA 30179
 Phone (800) 520-6593

SPECIFICATION DATA SHEET

Date: 1/27/14

MODEL No. 168
Air Tite with Damper for Duct

DIMENSIONAL DATA

SIZES AVAILABLE: 4" THROUGH 20" DIAMETER

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel,
 G-30 Coating LFQ Chemical Treatment

Gasket:

Fire Retarant Polyethylene Foam with Double Stick
 3M Tape UL94 HF-1

A

<u>Diameter</u>	<u>Gauges</u>	<u>Total Height</u>
4"-9"	30GA	5 1/2"
10"-20"	28GA	5 1/2"

*See Note below for Smacna Requirements

Assembly:

Air Tites are assembled with 1/8" x 1/8" Zinc Coated Steel
 Rivets.

OPTIONS


Available in 26GA and 24GA upon request
 Aluminum: 4-14"-Fabricated from 3003-H14 in 26GA

Raised Quadrants:

Duro Dyne #7210 ESO38R-150 3/8" Standoff Regulator
 for 1 1/2" wrap
 Duro Dyne #7206 ESO14R-200 1/4" Standoff Regulator
 for 2" wrap.

SMACNA Requirements:

ASTM-A653 CS Type B Galvanized Steel 26GA
 G-60 or G-90 Coating

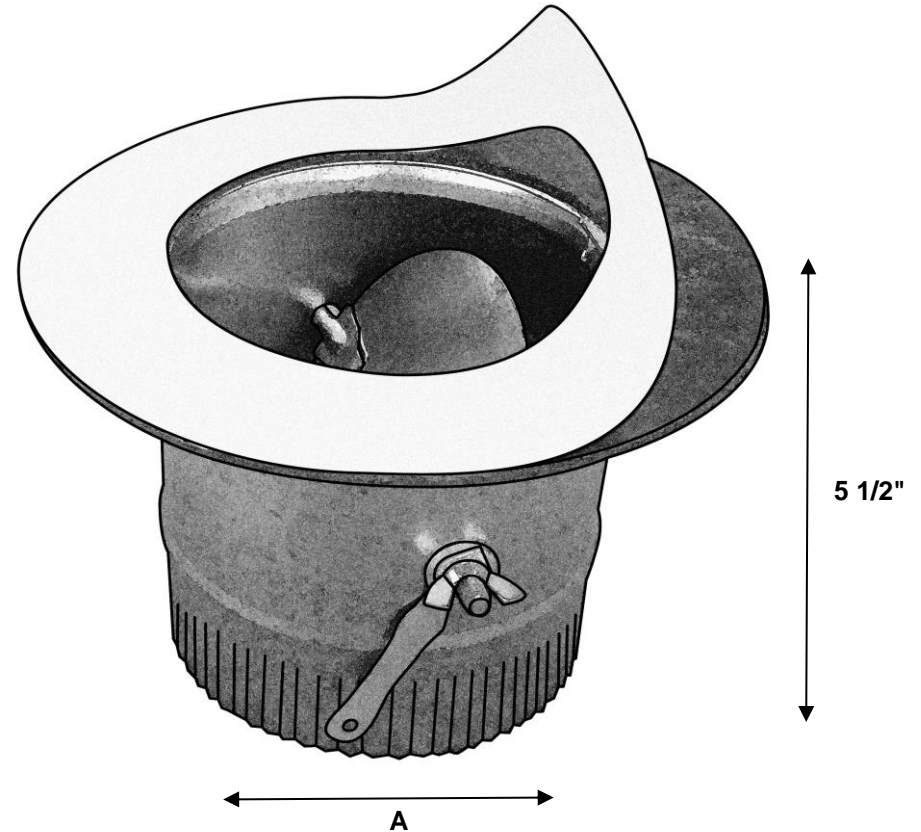

Superior Quality, Superior Service, Superior Value.. that's the Royal Advantage