



100 Royal Way
 Temple, GA 30179
 Phone (800) 520-6593

SPECIFICATION DATA SHEET

Date: 1-27-14

MODEL No. 173
Air Tite with Damper for Pipe

DIMENSIONAL DATA

SIZES AVAILABLE: 4" THROUGH 20" DIAMETER

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel,
 G-30 Coating LFQ Chemical Treatment

*26GA G-90 Coating LFQ Chemical Treatment Available to meet SMACNA

Gasket:

Fire Retartant Polyethylene Foam with Double Stick
 3M Tape UL94 HF-1

<u>Diameter</u>	<u>Gauge</u>
4"-9"	30GA
10"-20"	28GA

<u>Diameter</u> <u>Size:</u>	<u>Die Stamp</u> <u>to fit Pipe Size</u>	<u>Will Fit</u> <u>Pipe Range</u>	<u>Total</u> <u>Height</u>
4"	8"	6"-10"	6 1/2"
5"	9"	6"-10"	6 1/2"
6"	10"	8"-12"	6 1/2"
7"	10"	8"-12"	6 1/2"
8"	12"	10"-14"	7"
9"	12"	10"-14"	6 3/4"
10"	14"	12"-16"	7 3/4"
12"	16"	14"-18"	7"
14"	18"	16"-20"	7 1/2"
16"	20"	18"-22"	7 1/4"
18"	22"	20"-24"	7 3/4"
20"	24"	22"-26"	8 3/4"


Assembly:

Air Tites are assembled with 1/8" x 1/8" Zinc Coated Steel Rivets

Options:

Duro Dyne #7210 ESO38R-150 3/8" standoff regulator 1 1/2" wrap

Duro Dyne #7206 ESO14R-200 1/4" standoff regulator 2" wrap

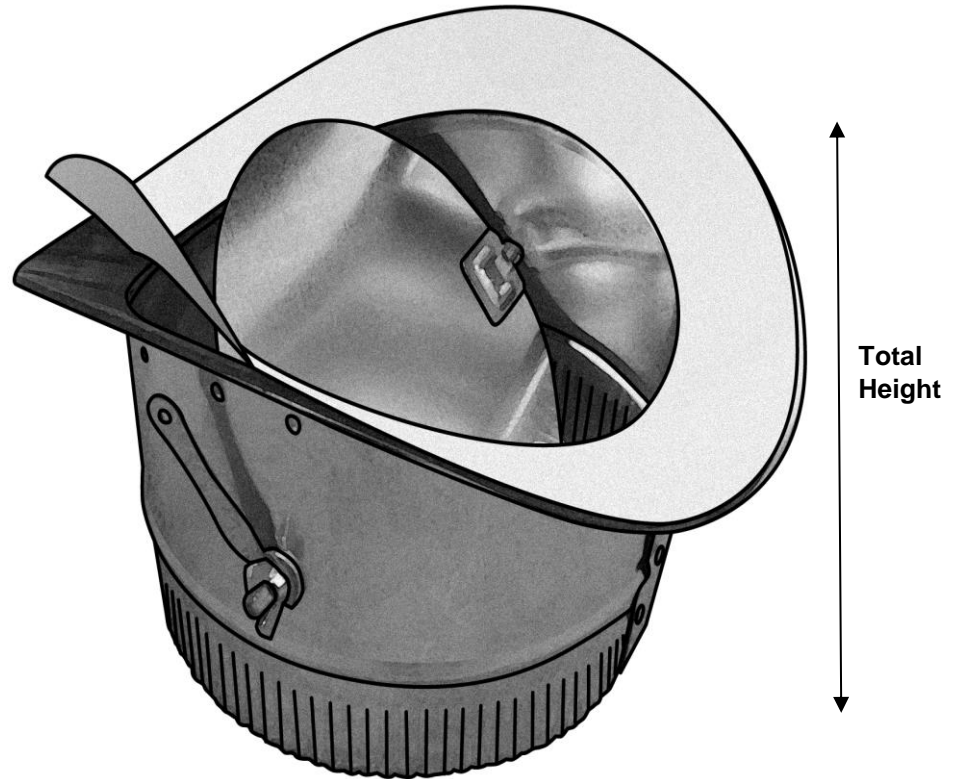

Superior Quality, Superior Service, Superior Value.. that's the Royal Advantage