

100 Royal Way Temple, GA 30179 Phone (800) 520-6593

SPECIFICATION DATA SHEET

1/15/2014

MODEL No. 262 & 262R8 Snap Collar for Duct Board

DIMENSIONAL DATA

SIZES AVAILABLE: 4" THROUGH 20" DIAMETER

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel, G-30 Coating LFQ Chemical Treatment

Gauges: 4" - 9" 30GA

10" - 20" 28GA

Assembly:

Collar is roll formed and features a 5/8" Outboard Flange internally sealed with Hot Melt Adhesive and a 1/4" Convex Bead for Duct Connection. There is a Hem on top of the collar.

Features:

- 1 1/8" tabs are designed for 1" and 1 1/2" Duct Board
- 3/8" Round Punch out tab can be removed for damper assembly
- 1 1/4" Double Clic Tab for Easy Assembly

Options:

262 - nested


262S - snapped together

262SD - snapped with damper

262SCD - with scoop and damper

262SG - snapped with gasket

262R8 - nested for 2" duct board

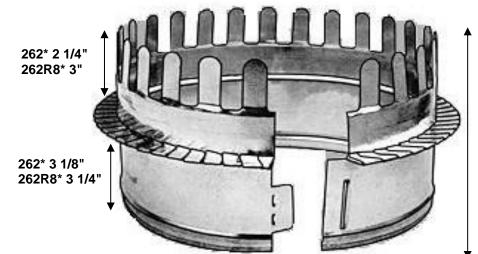

262* 5 1/2" 262R8* 6 1/4"