



100 Royal Way
 Temple, GA 30179
 Phone (800) 520-6593

SPECIFICATION DATA SHEET

MODEL No. 504
Top Outlet
Insulated Box

Date:12-4-14

DIMENSIONAL DATA

<u>Register Size AxB</u>	<u>Collar Size</u>	<u>R4/R6/R8 Actual Dimensions</u>	<u>Height</u>
8x4	4, 5	10x6	3½"
10x6	5, 6	12x8	3½"
12x6	6, 7	14x8	3½"
12x8	8	14x10	3½"
14x6	8	17x9	3½"

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel,
 G-30 Coating LFQ Chemical Treatment

Gauge: 30GA

Assembly:

Ceiling boot assembled with C-115 2/16" zinc coated steel rivets and has a rectangular opening. The collar is 3½" tall roll formed 30GA steel with 1/4" roll formed beading.

Insulation:

Knauf Equipment Liner M with ECOSE® Technology
 Available Thickness: R4 - 1", R6 - 1½", & R8 - 2"


ASTM C 1071, Type I, Flexible (replaces obsolete Federal Specification HH-I-545B.) NFPA 90A/90B, ASTM C 665/1617
 Temperature Range (ASTM C 411), Microbial Growth (ASTM C1338, G21)

Option:

504D - with damper
 504R6DBT - DB top without collar
 Available in 26GA upon request



*Also available with a duct board top no collar 504R6DBT

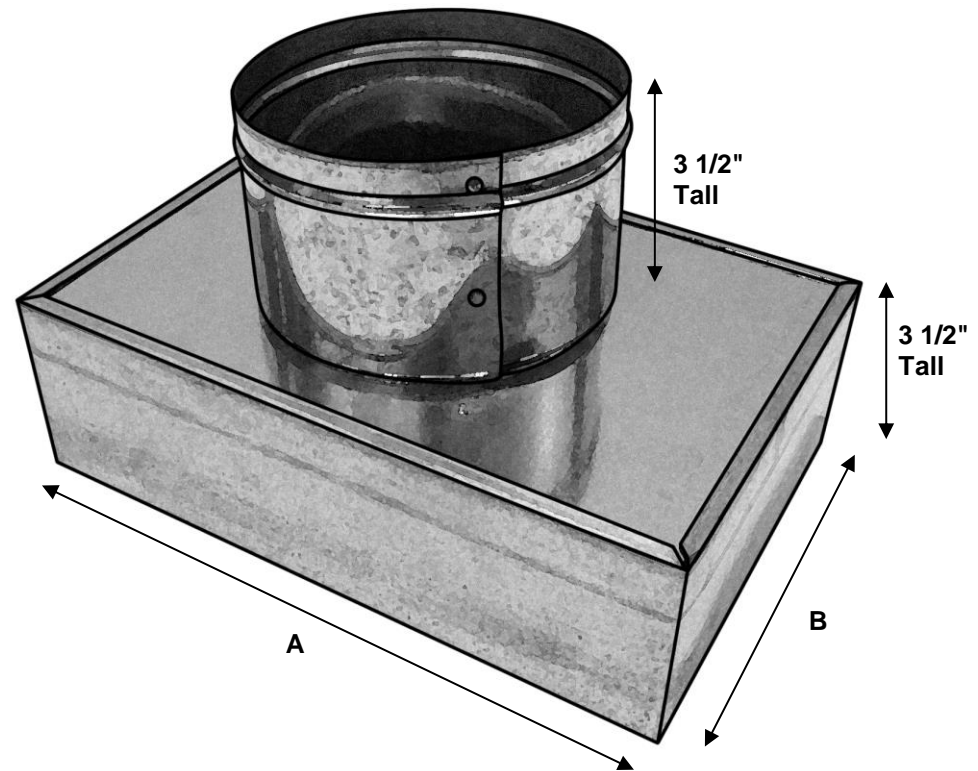

Superior Quality, Superior Service, Superior Value.. that's the Royal Advantage