



100 Royal Way
Temple, GA 30179
Phone (800) 520-6593

SPECIFICATION DATA SHEET

Date: 8/1/2025

MODEL No. 526R6
DB Top Insulated Box

DIMENSIONAL DATA

<u>Register Size</u>	<u>Actual Dimensions</u>
<u>AxB</u>	
8X4	10X6
10X6	12X8
12X6	14X8
14X8	16X10
10X10	12X12
12X12	14X14
14X14	16X16
16X16	18X18
18X18	20X20
20X20	22X22

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel - 30GA
G-30 Coating LFQ Chemical Treatment

Assembly:



Ceiling boot assembled with C-115 2/16 zinc coated steel rivets.
Rectangular opening with 1" 90deg outboard flange and 1/2" drywall lip.

Johns Manville Duct Liner PM 2" Fiberglass Duct Liner
fiber glass board on one side with a foil-scrim-kraft(FSK) vapor retarder
and a lightweight black fiber glass mat on the airstream surface.
ASTM C1136; Type II (FSK facing), ASTM G 21, C 411, UL 181,
ASTM C 665, NFPA 90A & 90B.

Johns Manville Duct Liner PM 2" Fiberglass Duct Liner
Available Thickness: R6 - 1½"
ASTM C 1071, Type I, Flexible (replaces obsolete Federal
Specification HH-I-545B.) NFPA 90A/90B, ASTM C 665/1617
Temperature Range (ASTM C 411), Microbial Growth
(ASTM C 1338, G 21)



OPTIONS: 526R6G w/fire retardant polyethylene foam double stick
3M tape UL94-HF-1

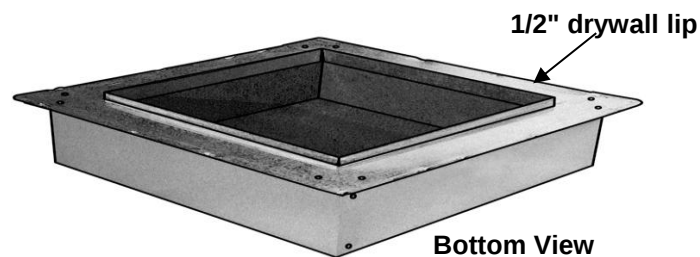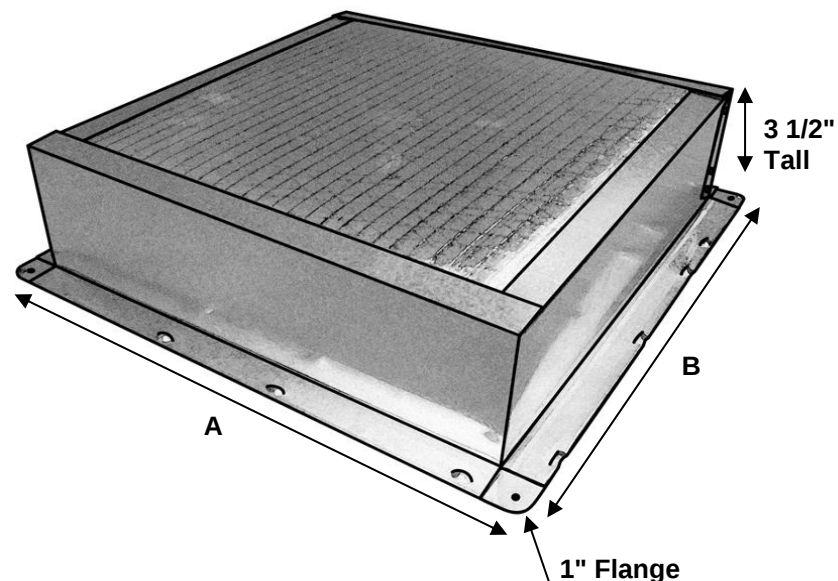

Superior Quality, Superior Service, Superior Value.. that's the Royal Advantage