



100 Royal Way
Temple, GA 30179
Phone (800) 520-6593

SPECIFICATION DATA SHEET

Date: 8/1/2025

MODEL(s) 800, 802 MODEL(s) 800G, 802G Conical Spin Fittings for Metal

DIMENSIONAL DATA

AxB	C	C
Diameter	Height	Height w/damper
6 x 4	10"	10"
7 x 5	10"	10"
8 x 6	10"	10"
9 x 7	10"	10"
10 x 8	10"	10"
12 x 9	10"	10"
12 x 10	10"	10"
14 x 12	10"	10"
16 x 14	10"	10"
18 x 16	10"	10"
20 x 18	10"	10"

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel
G-30 Coating LFQ Chemical Treatment
4" through 18" - 24GA

Assembly:

Continuous weld longitudinal seam for no air leakage.
Meets SMACNA standards - 10" W.G. Static Pressure

Available Options

Gasket: Fire Retardant Polyethylene Foam with
Double Stick 3M Tape UL94 HF-1

Damper: Standard regulator
or
2" Rossi TwistKnob raised quadrant
with 3/8" continuous rod

Conical Spin Fittings

Model(s) 800, 802


(shown with damper and standard regulator)

Model Options

800: Spin-in Conical

802: Spin-in Conical w / damper

802RQ2S: Spin-in Conical with damper and
2" raised quadrant w / 3/8" continuous rod

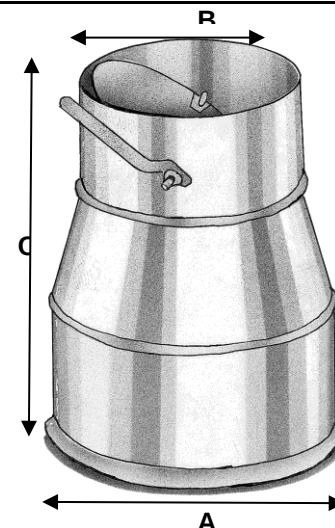

Conical Fittings with Airtite Gasket

Model(s) 800G, 801G, 802G, 802GRQ2S




Model Options

800G: Conical Fitting with Airtite Gasket

802G: Conical Fitting with Airtite Gasket and Standard
Regulator Damper

802GRQ2S: Conical Fitting with Airtite Gasket, Damper and
2" raised quadrant w / 3/8" continuous rod



**Rossi
Twistknob**

Superior Quality, Superior Service, Superior Value.. that's the Royal Advantage